



BioPro IEX Resins







Antibodies

Oligonucleotides

Proteins/Peptides

www.ymc.de

BioPro IEX: Designed for bioseparations

Concentration of the second

NUMBER ENLIGHTER

Contents


Introduction
Purification of monoclonal antibodies
Purification of oligonucleotides
Purification of proteins and peptides
Properties of BioPro IEX resins
Dynamic Binding Capacity
Alkaline CIP Stability
Pressure-Flow Characteristics and Scalability
Specifications and Ordering information
More about YMC40–43

on-exchange (IEX) chromatography separates biomolecules according to differences in their overall surface charges. The resin contains charged groups that form reversible interactions with the charged amino acid side chains on a biomolecule's surface. These are then eluted from the column using gradients, either salt concentration or pH.


Salt ions compete with biomolecules for the charged groups on the resins. This means that as the salt concentration in the mobile phase increases, the biomolecules will start to be released from the resin and elute from the column.

The proteins with the lowest net charge will be eluted first, and those with the highest net charge will come off last. With a pH gradient, the order of elution depends on the isoelectric points (pl) of the biomolecules being separated. The isoelectric point is the pH at which the charged groups on a biomolecule cancel one another out, making the overall charge for that biomolecule zero.


With cationic resins, for example, while the pH of the mobile phase is below the isoelectric point of a biomolecule, its overall charge will be positive and it will bind to the resin. When the pH of the mobile phase rises above the isoelectric point, the overall surface charge of the biomolecule will become negative and it will be released from the resin and will elute from the column.

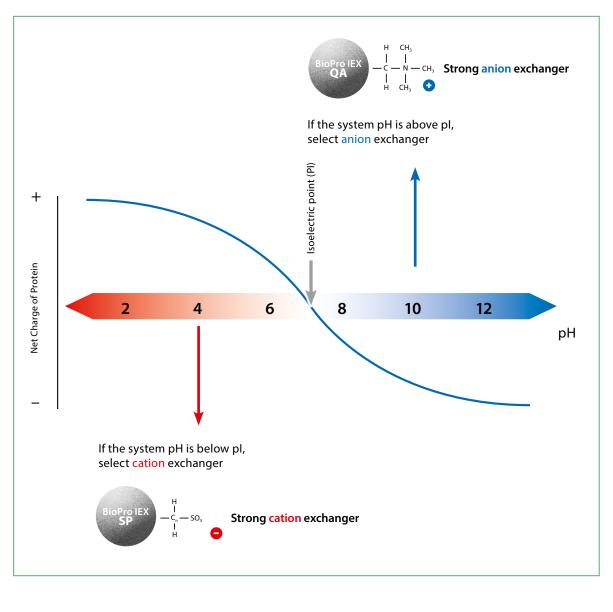

Ion exchange chromatography

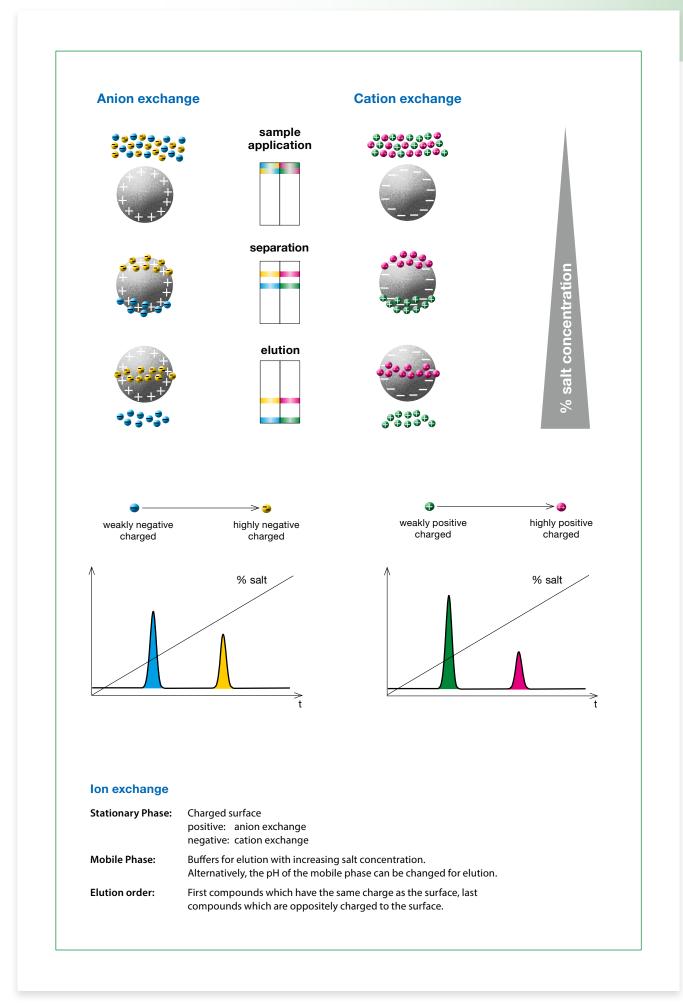


Application of IEX resins in DSP

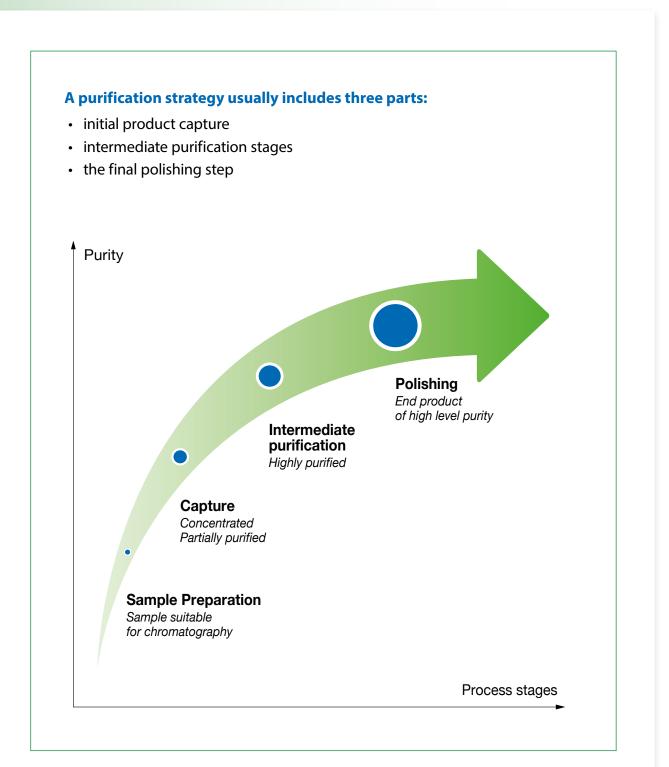


The capture step aims at isolating and concentrating the targets. It requires that the media has a high binding capacity even at high flow rates and easy scale-up steps. The intermediate purification is for removing the bulk impurities. The polishing step is used for removing all traces of impurities. The corresponding media should exhibit high resolution and low non-specific adsorption. YMC's IEX resins can be used for all stages during the whole process from the capture to the final polishing.


Guide to IEX media selection

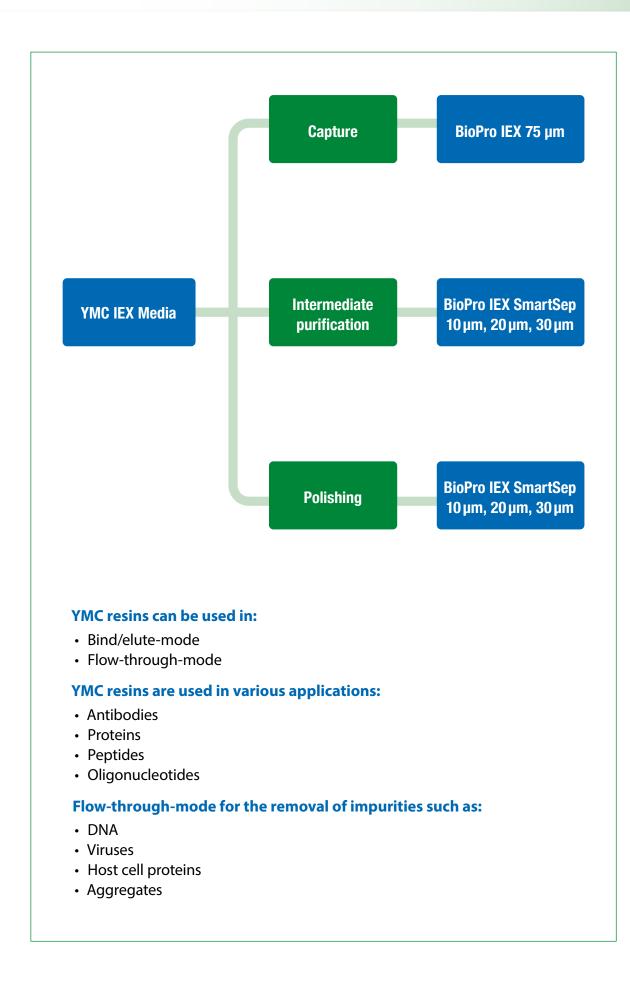


Guide to IEX media selection

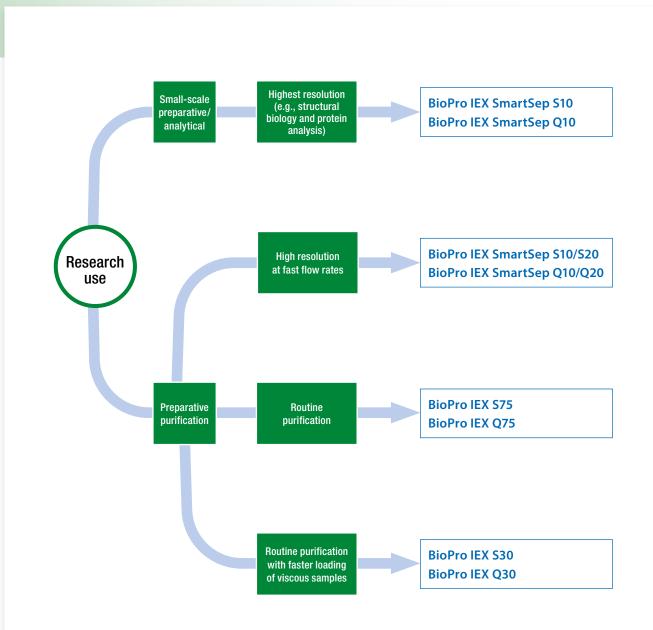

Screening Guide

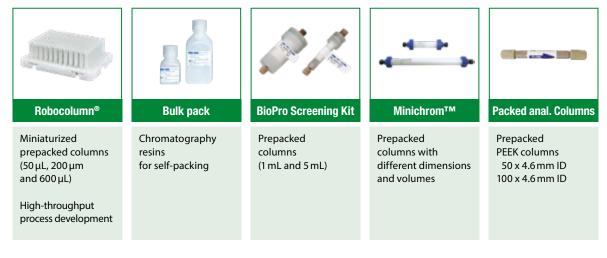

Guide to IEX media selection

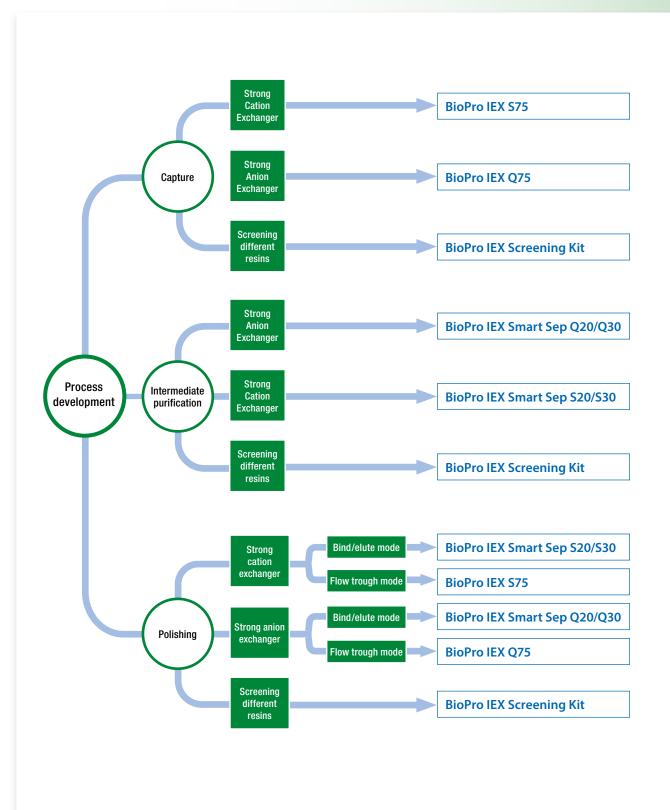


BioPro IEX Resins Screening Kits

Various types of screening kits available Please contact your YMC representative

2


The purification of a mAb from a 50 L CHO cell culture was studied under GMP conditions using BioPro IEX S75 and BioPro IEX Q75 ion exchange resins. The final three-step process succeeded in producing mAbs with high purity and efficiency. The results were directly compared with those achieved using competitive IEX resins under identical conditions.

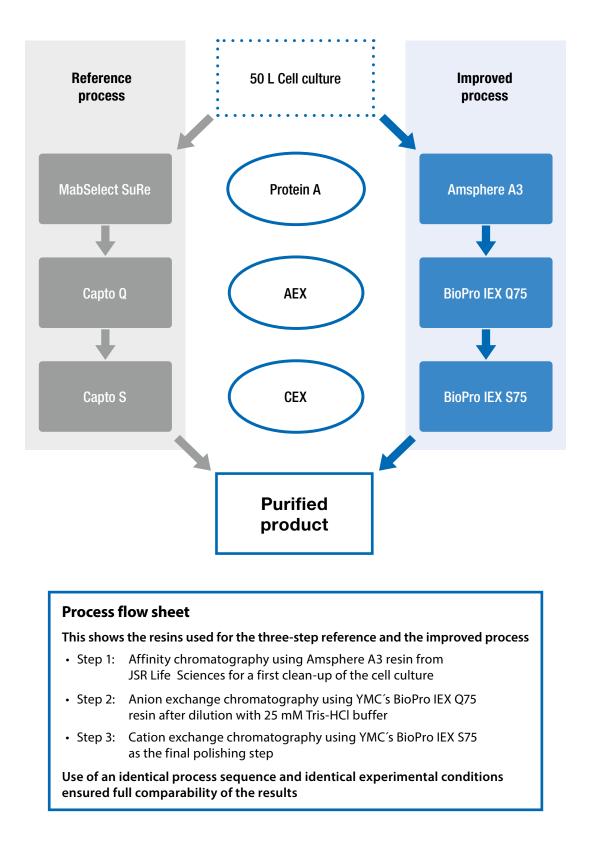

Anion exchange process conditions


- The highly efficient removal of host cell protein (HCP) and DNA was achieved using YMC's BioPro IEX Q75.
- An optimisation study was carried out to evaluate the influence of pH on this step. Product yield and residual HCP concentration were constant between pH 8.0 and 9.0.

→ robust & flexible process!

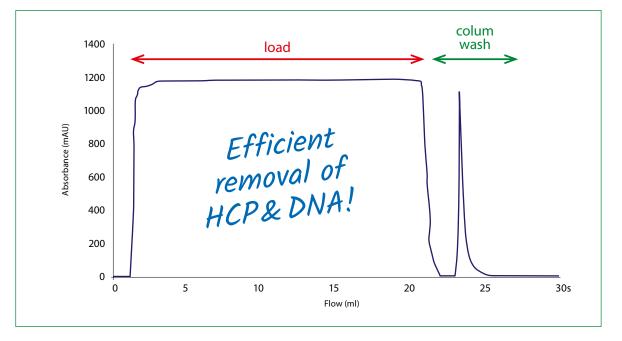

Cation exchange process conditions

- Comparison of the DBC breakthrough curves for BioPro IEX S75 and a competitive resin
- An increased capacity is clearly visible and this improves the efficiency of the overall process with a larger amount of product purified with each chromatographic cycle.

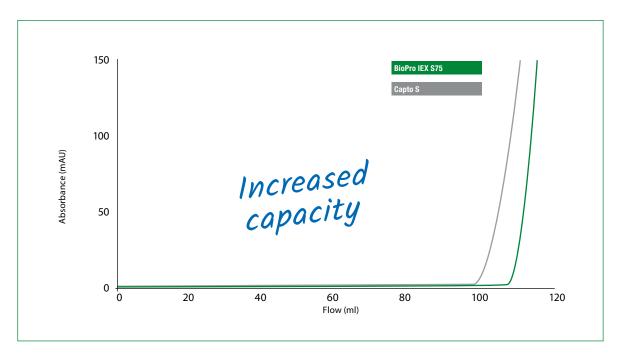

An improved purification process was successfully developed. The results shown in the table below clearly indicate the potential for process optimisation achievable using YMC resins. By addressing this potential, purities and yields can be improved to increase the overall productivity and the cost-efficiency of the related processes.

Process step	HCP (ng / mg lgG)		DNA (pg / mg lgG)		mAb Monomer (%)	
Cell culture fluid (Ref.)	127,000		66,900,000			
	Ref.	YMC/JSR	Ref.	YMC/JSR	Ref.	YMC/JSR
Protein A capture	194	145	26,200	18,000	-	98.6
AEX	4.57	0.64	1.12	< 0.44	92.2	98.5
CEX	3.04	0.46	1.98	< 0.12	93.9	98.6

Results for improved three-step process for the purification of IgG in compared to the reference process


More efficient removal of HCP and DNA

Result summary

- The highly effective purification of the developed process is apparent
- YMC's BioPro IEX resins are the ideal choice for efficient purification of mAb
- The AEX step was particularly effective in reducing residual impurities
- The CEX step was successful as the last step for polishing, removing the remaining trace contaminants
- With 98.6 % yield the process had a very high recovery of purified mAbs

Purification Scheme for Adalimumab

For the purification of monoclonal antibodies high demands are required from the resin used. Factors influencing the binding characteristics of IgG are pH, linear velocity and/or salt concentration (conductivity) at the time the sample is loaded onto the column. Therefore, a resin with highly stable performance is required with regard to all those factors. In order to demonstrate the performance of BioPro IEX resins, several studies have been performed.

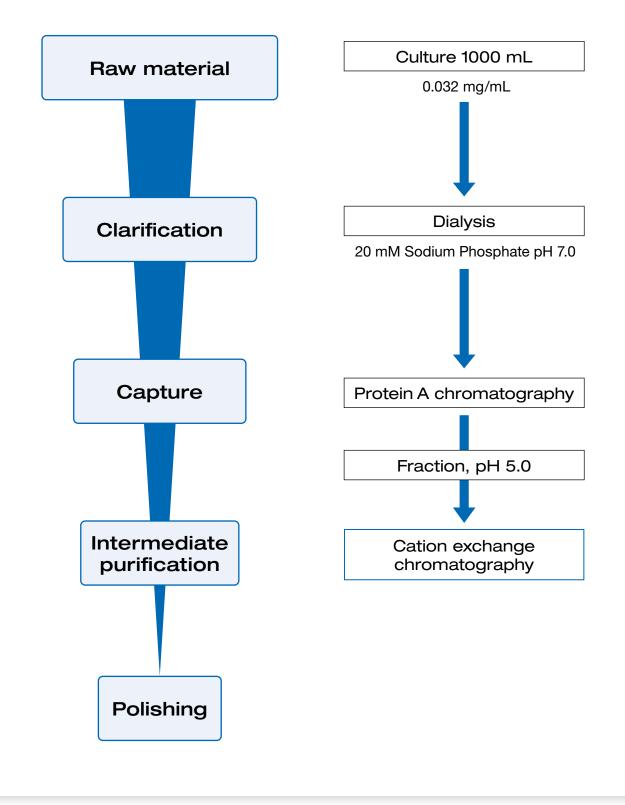

Purification of anti-human TNF-a monoclonal antibody was performed using BioPro IEX Smart-Sep and the influence of factors such as pH, linear velocity and salt concentration were studied. The BioPro IEX SmartSep material shows good performance in all the tests.

Comparison of the Performance of BioPro IEX SmartSep and Competitors' Products for the Purification of anti-human TNF- α monoclonal antibody

Anti-human TNF-α monoclonal antibody BioPro IEX SmartSep S30
GE Source 30S pH 5.3
rProtein A ↓
0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46 48 50 mi
pH 6.0 rProtein A ↓
0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46 48 50 mi
Column: 50 x 5.0 mm ID Eluent: A) 20 mM citric acid-NaOH (pH 5.3) B) Eluent A containing 0.5 M NaCl Gradient: 0-100% B (0-30 CV) Flow rate: 180 cm/hr (0.59 mL/min) Temperature: ambient Detection: UV at 280 nm Sample: Sample: Anti-human TNF-α monoclonal antibody (after affinity chromatography) IgG Load: 0.1 mg Injection: 0.25 mL

Influence of pH, linear velocity and salt concentration on the purification of IgG using BioPro IEX SmartSep


Experimental conditions

pH: 6.0 vs. 5.3 Linear velocity: 200–800 cm/hr Salt concentration: 0–50 mM NaCl

Column: Eluent:	50 x 5.0 mm ID A) 20 mM citric acid-NaOH buffer (pH 5.3 or 6.0)	Temperature Detection: Sample:	: ambient (25°C) UV at 280nm 1.5 mg/mL human polyclonal
Flow rate:	B) Eluent A containing 0.5 M NaCl 200–800 cm/hr (0.66-2.62 mL/min)		IgG in equilibration buffer

Influence of pH


	DBC (mg/mL-resin, 10% breakthrough)		
pH	рН 5.3 рН 6.0		
BioPro IEX SmartSep S30	110	103	
Tosoh TSKgel SP-3PW (30 μm)	61	64	
GE Source 30S (30 μm)	58	58	

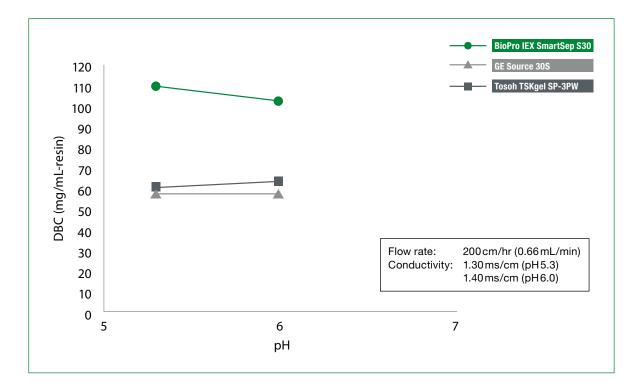

High binding capacities are achieved regardless of the pH of elution. Therefore, milder eluting conditions for IgG can be selected to protect the product purity.

Influence of salt concentration


	DBC (mg/mL-resin, 10% breakthrough)			
рН	5.3			
NaCl concentration	0 mM 25 mM 50 mM			
Conductivity 1.36 mS/cm 4.14 ms		4.14 mS/cm	6.8 mS/cm	
BioPro IEX SmartSep S30	107	97	50	
Tosoh TSKgel SP-3PW (30 μm)	64	55	27	
GE Source 30S (30 µm)	58	49	19	

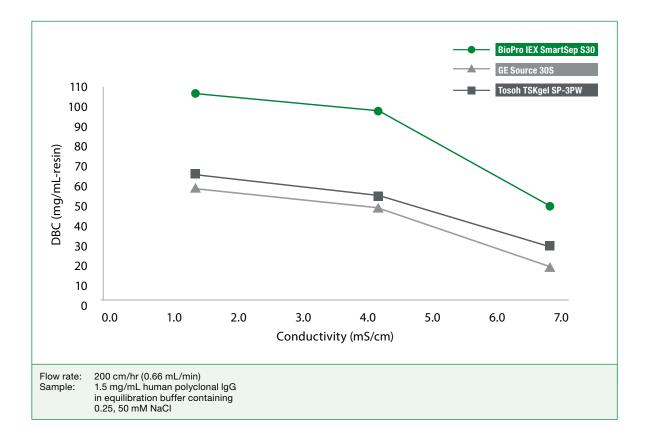

BioPro IEX SmartSep S30 has a higher tolerance to salt concentration. This simplifies the desalting process after Protein A chromatography and will help to shorten the production process.

Influence of linear velocity

	DBC (mg/mL-resin, 10% breakthrough)			
рН	5.3			
NaCl concentration	0 mM 25 mM 50 mM			
Conductivity	1.36 mS/cm 4.14 mS/cm 6.8 mS		6.8 mS/cm	
BioPro IEX SmartSep S30	110	93	84	
Tosoh TSKgel SP-3PW (30 μm)	61	42	26	
GE Source 30S (30 µm)	58	41	23	

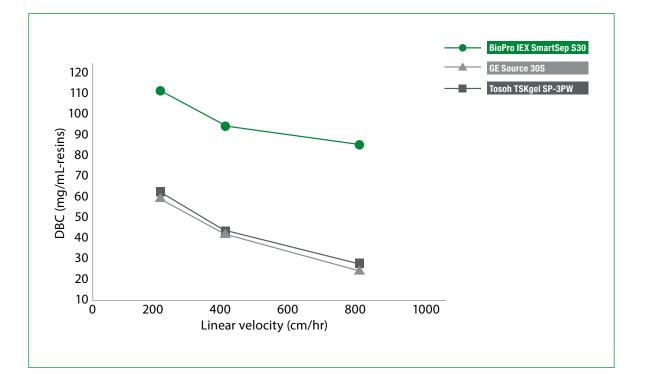


BioPro IEX SmartSep S30 maintains higher binding capacity values over a wider range of linear velocities. This will increase the product throughput for the purification process.

Conclusions

BioPro IEX SmartSep resins meet the highest demands for the purification of monoclonal antibodies. High binding capacity is achieved regardless of elution of pH, linear velocity or salt concentration. This allows purification processes to be carried out more efficiently.

- Higher throughput with no loss of efficiency
- Simplification of desalting processes
- Reduced processing costs
- Short delivery time for industrial-scale quantities
- Full compliance with GMP regulations

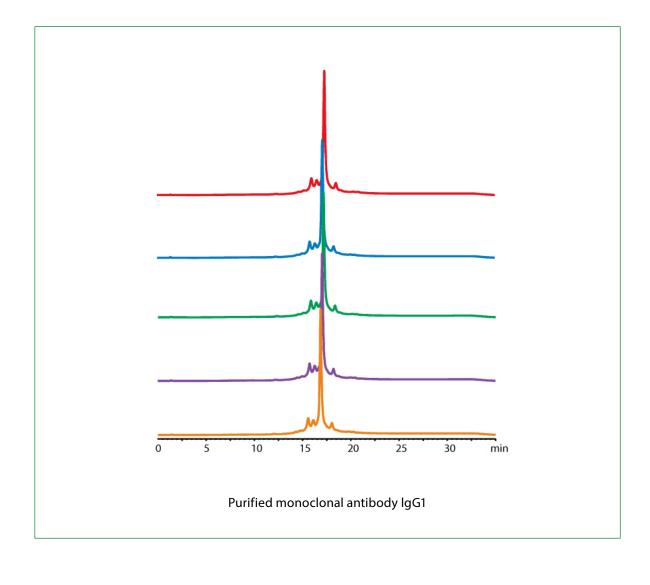


١o

Examples of analysis under the optimised conditions

Nucleic acids such as antisense RNA (asRNA), small interfering RNA (siRNA) and aptamers are expected to be the next generation of biopharmaceuticals. In order to provide these drugs, purification and analytical separations that can recognize slight structural differences after synthesis are important issues.

Samples

	-		ζ DNA	γ°γ RNA
1	Single-	5'-TCATCACACTGAATACCAAT-3' (DNA 20 mer)		
2	strand DNA	5'-GTCATCACACTGAATACCAAT-3' (DNA 21 mer)		0 0Me 0 0-P=0 N NH2
3		5'-U(M)C(M)A(M)U(M)C(M)A(M)C(M)A(M)C(M)U(M)G(M)A(M)A(M)U(M)A(M)C(M) C(M)A(M)A(M)U(M)-3' (2'-OMe RNA 20 mer)	HO H	
4	Single- strand	5'-G(M)U(M)C(M)A(M)U(M)C(M)A(M)C(M)A(M)C(M)U(M)G(M)A(M)A(M)U(M)A(M) C(M)C(M)A(M)A(M)U(M)-3' (2'-OMe RNA 21 mer)		'-OMe RNA ୁ
5	RNA	s5'-UCAUCACACUGAAUACCAAU-3' (RNA 20 mer)		NH NH ₂
6		5'-GUCAUCACACUGAAUACCAAU-3' (RNA 21 mer)	°-5=0	
		N(M)=2'-OMe RNA	но	н

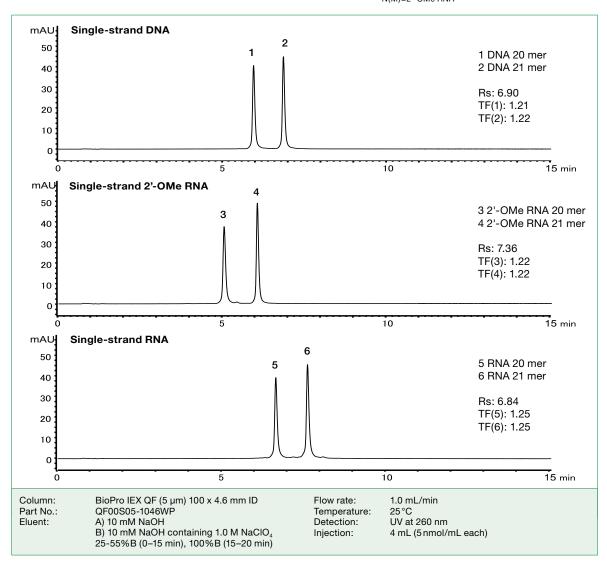


Good separation without carry over or peak tailing of oligonucleotides was achieved by optimisation of the buffer/counter ion in the mobile phase and gradient profile, and by using the non porous anion exchange column BioPro IEX QF.

Separation of ssDNAs with single-base differences

Samples

1		5'-TCATCACACTGAATACCAAT-3' (DNA 20 mer)
2	Cinala	5'-GTCATCACACTGAATACCAAT-3' (DNA 21 mer)
7	Single- stranded DNA	5'-ATCATCACACTGAATACCAAT-3' (DNA 21 mer)
8	DNA	5'-CTCATCACACTGAATACCAAT-3' (DNA 21 mer)
9		5'-TTCATCACACTGAATACCAAT-3' (DNA 21 mer)


When ssDNAs (single-stranded DNAs) with singlebase differences (differing in the type of base of 5' end of DNA 21mer) are analysed under the conditions described, all of the peak separations got worse. By using a shallower gradient, improved separations could be achieved.

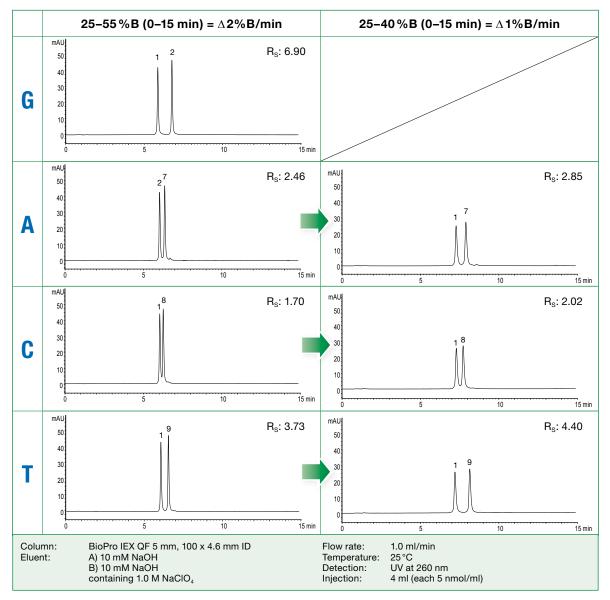

Samples

10	Cingle	5'-T^T^T^T^T^T^T^T^T^T^T^T^T^3' (DNA 15 mer 12PS, 2P0)		
11	Single- stranded DNA	5'-T^T^T^T^T^T^T^T^T^T^T^T^T^T-3' (DNA 15 mer 13PS, 1P0)	о н	
12	DNA	5'-T^T^T^T^T^T^T^T^T^T^T^T^T^T-3' (DNA 15 mer All PS)	-s-p=0	(-0)-P=0
13	Single-	5'-U^C^A^U^C^A^C^A^C^U^G^A^A^U^A^C^C^A^A^U-3' (RNA 20 mer All PS)	HO H	HO H
14	stranded RNA	5'-G^U^C^A^U^C^A^C^A^C^U^G^A^A^U^A^C^C^A^A^U-3' (RNA 21 mer All PS)	Phosphorothioate Linkage (PS)	Phosphodiester Linkage (PO)
-		^=Phosphorothioated		


Using the optimised conditions described, [all PS], [13PS, 1PO] and [12PS, 2PO] of DNA 15mer (samples 10–12) were clearly separated by ion exchange chromatography.

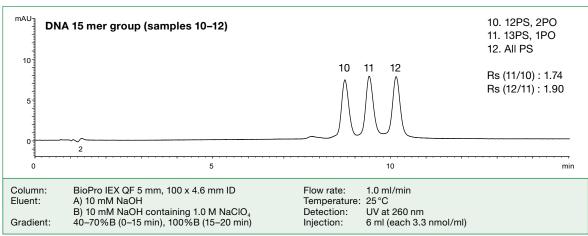

Resolution of phosphorothioate oligonucleotides with different degrees of thiolation

The separation of RNA 20mer all PS (sample 13) is compared with RNA 20mer all PO (sample 3) under the same conditions. Since acidity of all PS is much higher than that of all PO, a higher salt concentration is required for elution. The peak of all PS is much broader because it is thought that all PS contains as many as 219 (524, 288) stereoisomers.




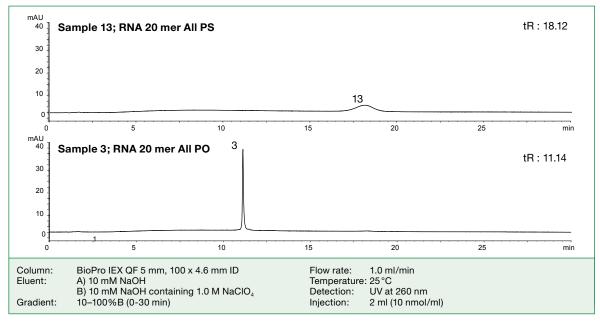


Conclusions

By using BioPro IEX :


- Each ssDNA, ssRNA and 2'-OMe ssRNA with single-base differences in length can be successfully separated.
- [All PS], [13PS, 1PO] and [12PS, 2PO], which consist of 15-mer ssDNA, can also be separated under the optimised conditions.
- Higher salt concentration is required to elute All PS compared to eluting All PO.
- All PS with single-base differences in length can be separated to a limited extent and for further optimisation is required.

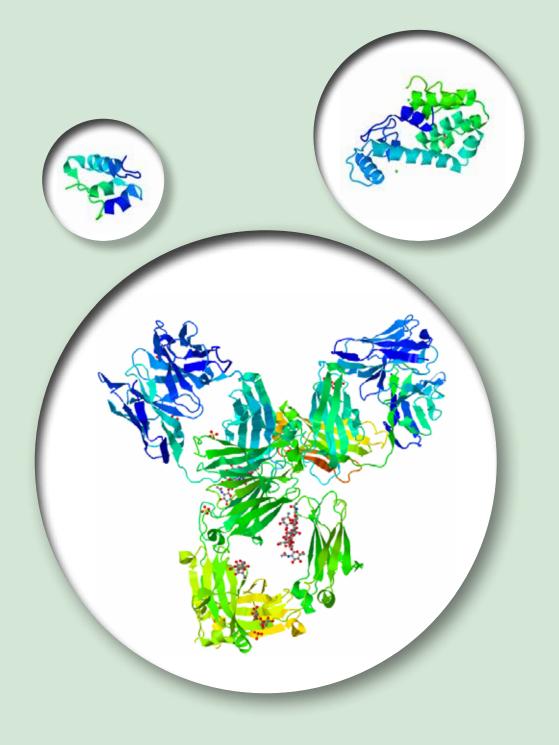

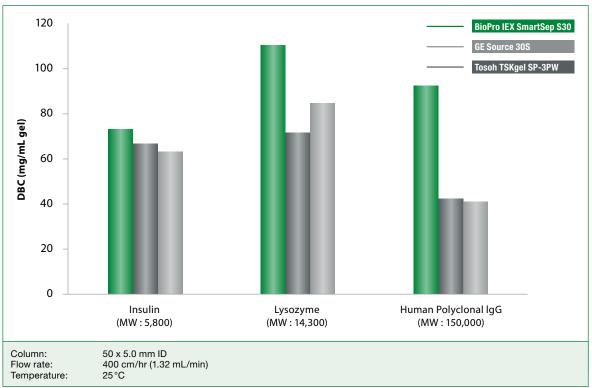


Comparison of the Performance of BioPro IEX SmartSep and Competitors' Products in the Purification of Lysozyme, Insulin and Polyclonal IgG

BioPro IEX SmartSep shows higher dynamic binding capacity for both small peptides and large proteins.

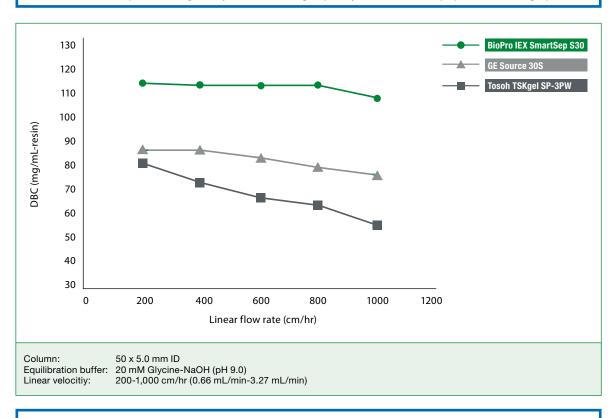

YMC's BioPro IEX resins show higher dynamic binding capacities over the full range of applicable flow rates.

BioPro IEX SmartSep resins offer the perfect solution for challenging separations. With the high binding capacity and recovery, the resins allow high-throughput purifications and increased productivity. Easy elution of target compounds improves the whole process.

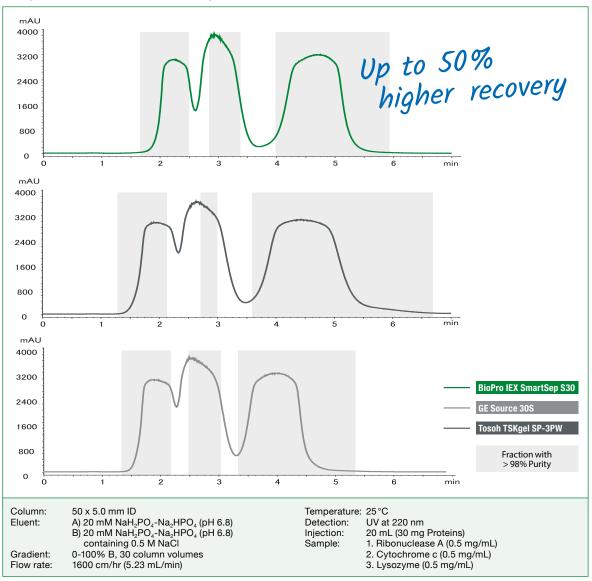

Comparison of resolution with competitors' materials

	Recovery (> 98% Purity)			
	Ribonuclease A	Cytochrome c	Lysozyme	Total
BioPro IEX SmartSep S30	90.5 %	81.5 %	99.3 %	90.7 %
TSKgel SP-3PW	74.2 %	54.4 %	99.5 %	76.9 %
GE Source 30S	87.2 %	76.0 %	99.5 %	87.8 %

BioPro IEX SmartSep S30 maintains its high resolution and high sample loading ability even at 1600 cm/hr and under high loading condition (30 mg/mL). It allows up to 50% higher recovery for specific target compounds compared to the competitor's materials. These features of the BioPro IEX SmartSep material indicate the possibility of cost savings for your purification.


The monoclonal antibody IgG (PI = 8.9) was purified in a two-step process out of cultured medium. The two combined separation modes are affinity and ion exchange chromatography.

For the second step, the strong cation exchanger

BioPro S75 is used in bind-and-elute mode. In order to evaluate the optimum purification conditions, the influence of salt concentration and pH during the washing phase were analysed in a DOE (design of experiments) process.

Recovery (%) at various salt concentrations and pH

pH Conductivity	4.5	5.0	5.5
15 mS/cm	72.2	40.1	0.0
12 mS/cm	73.4	68.2	10.1
9 mS/cm	73.1	69.5	64.0

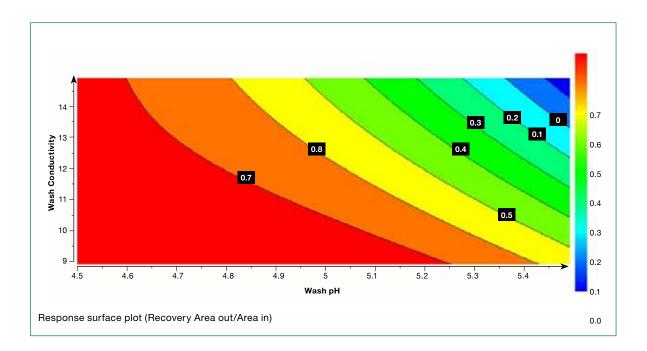

These results show that the recovery is higher if the washing step is performed under acidic conditions. As the target mAb should not be denatured, pH 5 was chosen for the purification. A conductivity of 10 mS/cm was selected for the washing step.

Properties of BioPro IEX resins

BioPro IEX resins

Scale up and availability of BioPro IEX

- Predictable scale-up process
- Preparative grade resins with particle sizes from 10 µm to 75 µm up to several thousand litres
- Full compliance with GMP requirements
- Short delivery for industrial-scale quantities
- High capacity with low operating pressures even at high flow rates
- Reduced processing costs
- Prepacked columns with 5 µm porous resins
- Non-porous resins for fast analysis






High dynamic binding capacity


High binding capacity and high recovery


The porous versions of BioPro IEX show high dynamic binding capacity (DBC) and excellent recovery, making them useful for preparative separations of proteins and antibodies.

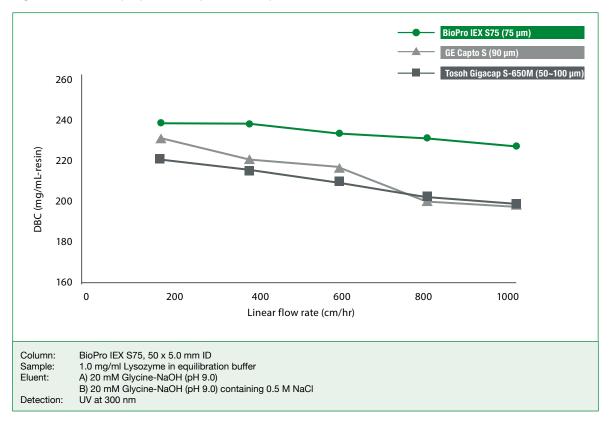

The sample loading at high flow rates is determined by the dynamic binding capacity of an ion exchange resin.


The dynamic binding capacity of BioPro IEX is excellent even at high flow rates. When compared to similar competitor products it consistently exhibits a higher dynamic binding capacity. This results in higher sample loading in a preparative processes.






BioPro IEX S75 Particles

High dynamic binding capacity

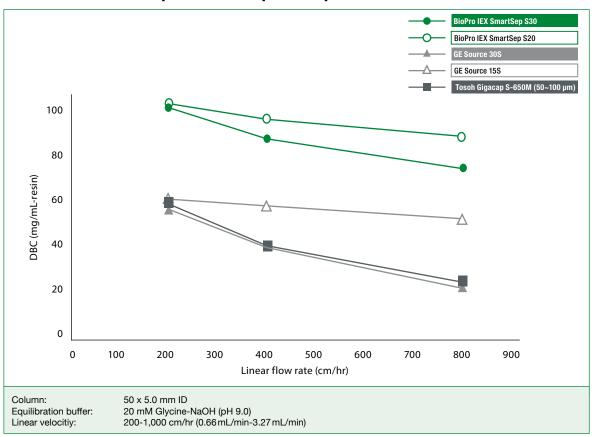

Comparison of the DBC for human polyclonal IgG at different flow rates for BioPro IEX SmartSep S30 and competitors' products.

BioPro IEX SmartSep shows considerably higher DBC across a wide range of linear velocity. A high DBC at flow rates of up to 1,000 cm/hr can reduce process time and significantly increase productivity.

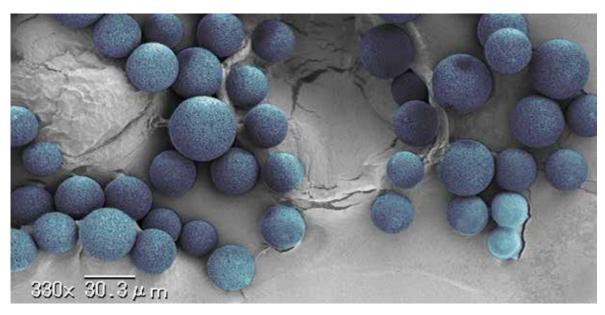

BioPro IEX S30 Particles


Cleaning-in-place (CIP) is essential for the economic use of packed chromatography columns. Efficient cleaning procedures increase the lifetime of the separation process and thereby contribute to the overall cost effectiveness. In addition, powerful CIP procedures strongly increase the safety and productivity of every downstream process.

Sodium hydroxide (NaOH) solutions are well established for the removal of precipitated proteins, hydrophobic proteins, nucleic acids, endotoxins and viruses and have become the first choice for cleaning and sanitising of chromatography resins. In order to optimise process development time and costs, there is an increasing demand for efficient cleaning procedures and compatible chromatography resins.

IEX resins from YMC are fully compatible with typical CIP procedures.

As an example, CIP studies have been performed using NaOH solutions with BioPro IEX S75/Q75 as well as with BioPro IEX SmartSep S30/Q30.

All YMC IEX resins maintain their performance values even after 100 CIP cycles.

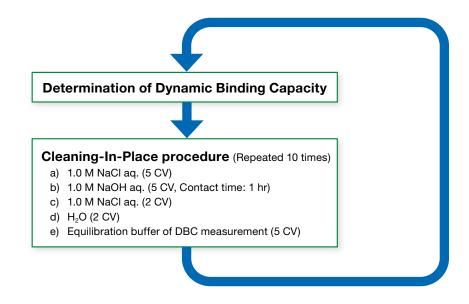

DBC (IgG) (BioPro IEX SmartSep S30, BioPro IEX S75)

Column: Equilibration buffer: Elution buffer: Flow rate:

50 × 5.0 mm ID 20 mM citric acid-NaOH (pH 5.3) Equilibration buffer containing 0.5 M NaCl 200 cm/hr (0.66 mL/min) Temperature: Detection: Sample:

25 °C UV at 280 nm 1.5 mg/mL human polyclonal IgG in equilibration buffer

DBC (BSA) (BioPro IEX SmartSep Q30, BioPro IEX Q75)

Column: Equilibration buffer: Elution buffer: Flow rate:


50 × 5.0 mm ID 20 mM Tris-HCI (pH 8.6) Equilibration buffer containing 0.5 M NaCI 200 cm/hr (0.66 mL/min) Temperature: Detection: Sample: 25°C UV at 280 nm 1.5 mg/mL BSA in equilibration buffer

CIP cycle


Temperature:

Column: Flow rates: 50 × 5.0 mm ID 200 cm/hr (1.0 M NaCl, H₂O, Buffer) 30 cm/hr (1.0 M NaOH) 25°C

Excellent alkaline CIP stability

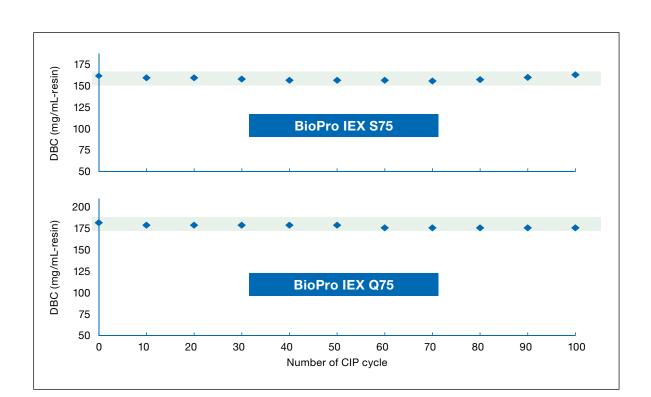


BioPro IEX S75 and Q75 maintain their binding capacity even after 100 CIP cycles. BioPro IEX resins show excellent alkaline CIP stability.

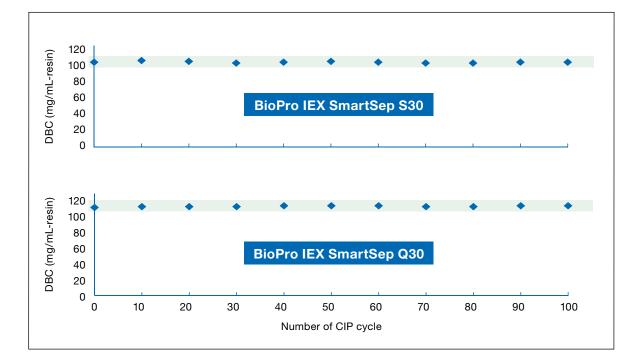

BioPro IEX SmartSep S30 and Q30 maintain their binding capacity even after 100 CIP cycles. BioPro IEX SmartSep resins show excellent alkaline CIP stability.


Pressure-flow characteristics

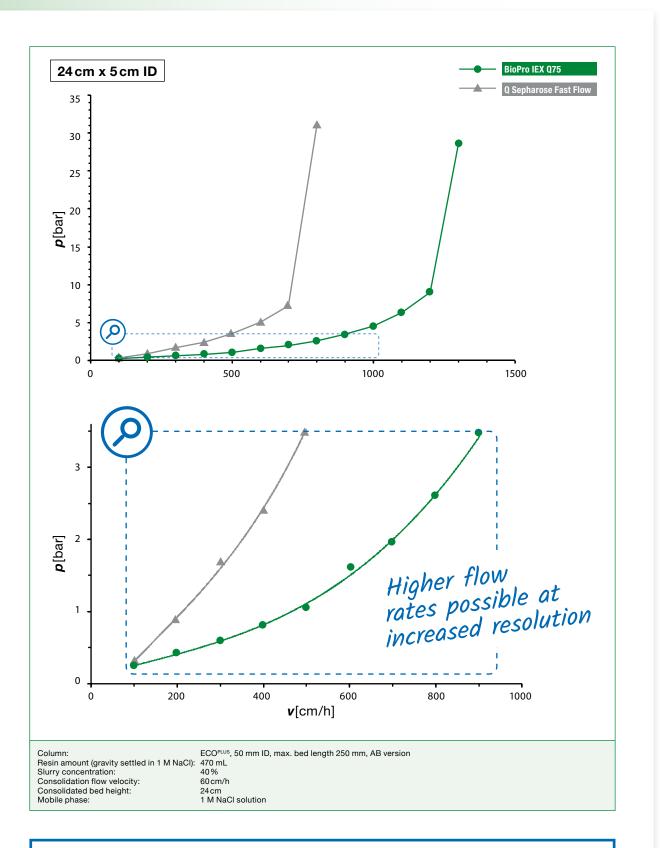

The pressure-flow curve of BioPro IEX Q75 suggests reversible compression behaviour over a wide range of linear flow velocity. Despite using smaller particles (75 µm) compared to the 90 µm particle size of the competitor's resin, BioPro IEX Q75 shows much better pressure flow characteristics. Higher flow rates can be applied to increase the throughput.

- Improved resolution
- Higher flow rates possible
- Increased productivity

Scalability of BioPro IEX resins

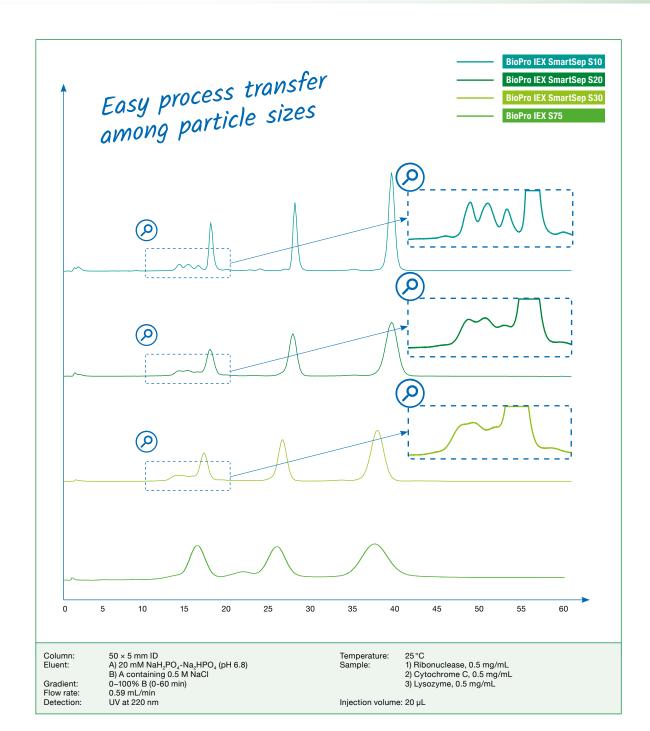

One of the advantages of YMC's BioPro IEX resins is its full scalability. This property provides an identical chromatographic behaviour across all particle sizes. This is beneficial, as separation and fractionation can be optimised on the analytical scale. Depending on the required resolution the optimal bead size can be selected. Then, the process can be reliably transferred to the production scale. This enables highly flexible implementation of BioPro IEX resins, resulting in a perfectly tailored solution. An illustrated example is depicted below for the three enzymes ribonuclease, cytochrome c and lysozyme. This shows that the separation of the main peaks remains stable across the four different particle sizes. If the highest resolution is required, $10 \,\mu$ m particles are the optimum choice. $10 \,\mu$ m particles allow the isolation of trace impurities.

During a capturing process the $75\,\mu m$ material demonstrates adequate separation. The three main peaks are well separated.

Specifications and Ordering information

•

Specifications

BioPro IEX for Capture

BioPro IEX Series	BioPro IEX Q75	BioPro IEX S75				
Ion exchange type	strong anion exchanger	strong cation exchanger				
Charged group	-R-N⁺(CH₃)₃	-R-SO₃⁻				
Matrix	Hydrophilic po	olymer beads				
Pore size	Por	ous				
pH Range	2–12					
Compression factor	1.05–1.15					
Particle size	75 µm					
Pressure resistance	0.3 MPa					
Typical flow rate	200–1000 cm/hr Max. 2000 cm/hr					
Ion-exchange capacity	min. 0.10 meq/ml-resin					
Dynamic binding capacity	min. 160 mg/ml-resin (BSA)	min. 160 mg/ml-resin (lysozyme)				

Regulatory support file available under non-disclosure agreement. Used in validated cGMP-manufacturing processes. Customised material available on request. DMF registered with FDA.

BioPro IEX SmartSep for intermediate purification and polishing

BioPro IEX Series	BioPro IEX SmartSep Q10	BioPro IEX SmartSep Q20	BioPro IEX SmartSep Q30	BioPro IEX SmartSep S10	BioPro IEX SmartSep S20	BioPro IEX SmartSep S30		
lon exchange type	stroi	strong anion exchanger strong cation exchanger						
Charged group		-R-N⁺(CH₃)₃			-R-SO ₃ -			
Matrix			Hydrophilic p	olymer beads				
Pore size			Por	ous				
pH Range	2–12							
Compression factor	1.05–1.15							
Particle size	10 µm	μm 20 μm 30 μm		10 µm	20 µm	30 µm		
Pressure resistance	3 MPa 2 MPa 3 MPa 2					ar use: 1Pa 3 MPa		
Typical flow rate	200–1000 cm/hr Max. 2000 cm/hr							
Ion-exchange capacity	min. 0.08 meq/ml-resin							
Dynamic binding capacity	min. 100 mg/ml-resin (BSA) min. 100 mg/ml-resin (lysozyme)					esin		

Screening kits and test samples

Screening kits and bulk samples for media selection and method development

YMC offers a number of ion exchange screening kits based on 1 mL or 5 mL columns and also bulk resin samples for testing. This provides a significant advantage and efficiency in resin screening and purification method development.



5 ml Type (26 x 15.6 mm ID)



- Purification method development
- Loadability studies

Please contact us to order your free bulk resin samples for testing.



YMC Europe GmbH · Schöttmannshof 19 · 46539 Dinslaken · Phone +49 (0)2064 427-0 · Fax +49 (0) 2064 427-222 · Email: info@ymc.de · www.ymc.de

Ordering information

Availability

- Large production capacity for YMC's IEX resins
- Lot sizes up to 400 L available
- Short delivery time even for large quantities
- Full compliance with GMP requirements

Strong anion exchanger: BioPro IEX Q

Product	Particle	Code	Pack Sizes*					
	Size		50 ml	250 ml	1 L	5 L	10 L	20 L
BioPro IEX SmartSep Q10	10 µm	QSA0S10	~	~	~	~	~	~
BioPro IEX SmartSep Q20	20 µm	QSA0S20	~	~	~	~	~	~
BioPro IEX SmartSep Q30	30 µm	QSA0S30	~	~	~	~	~	~
BioPro IEX Q75	75 µm	QAA0S75	 Image: A start of the start of	~	v	 	 	~

* Larger or customised pack sizes are available on request.

Strong cation exchanger: BioPro IEX S

Product	Particle	Code	Pack Sizes*					
	Size		50 ml	250 ml	1 L	5 L	10 L	20 L
BioPro IEX SmartSep S10	10 µm	SSA0S10	~	~	~	~	~	~
BioPro IEX SmartSep S20	20 µm	SSA0S20	~	~	~	~	~	~
BioPro IEX SmartSep S30	30 µm	SSA0S30	~	~	~	~	~	~
BioPro IEX S75	75 µm	SPA0S75	 Image: A start of the start of	~	 Image: A start of the start of	~	~	~

* Larger or customised pack sizes are available on request.

Regulatory support file available under non-disclosure agreement. Used in validated cGMP-manufacturing processes. Customised material available on request. DMF registered with FDA.


Preparative screening kits

Product name*	Particle Size	Pack size	Column volume	Product code			
	75			BPQAA0S75-01PK			
BioPro IEX Q75	75µm	5 / pack	5 mL	BPQAA0S75-05PK			
	00	30 µm 5 / pack 1 mL BPQSA0S30					
BioPro IEX SmartSep Q30	30μm	57 раск	5 mL	BPQSA0S30-05PK			
	00	E (a sala	BPQSA0S20-01PK				
BioPro IEX SmartSep Q20	20µm	57раск	5 / pack 1 mL BPQSA 5 mL BPQSA				
BioPro IEX S75	75			BPSPA0S75-01PK			
	75µm	5 / pack 5 mL BPSPA0S75-05Pt					
BioPro IEX SmartSep S30	00	5 / pack 1 mL BPSSA0S30-01Pk 5 mL BPSSA0S30-05Pk					
	30µm						
BioPro IEX SmartSep S20			BPSSA0S20-01PK				
	20µm	5 / pack	5 mL	BPSSA0S20-05PK			
IEX Selection Kit	00	4 / pack	1 mL	BPSIA0S99-01PK			
Q75/S75/Q30/S30	30µm, 75µm	1 per resin	5 mL	BPSIA0S99-05PK			

* Other screening kits are available on request

More about YMC









More about YMC



Fully Integrated Manufacturing

YMC operates a fully integrated manufacturing process for the BioPro IEX resins. This process includes the manufacture of the base beads and the modification for the IEX functionality.

This gives YMC complete traceability and control over the entire manufacturing process. YMC can guarantee reliable product supplies for today and in the future.



Global Supplies

BioPro IEX resins are available worldwide through a dedicated support network headed by YMC operations in Japan, the US and in Europe to ensure easy, reliable method transfer between research and production sites across the world. Batch sizes up to 400 L are available, in many different packaging formats. Individual supply agreements are common for validated processes.



Quality Control

The rigorous quality control procedures set by YMC start with the manufacturing of the base material. Every batch is evaluated for compliant reproducibility to ensure consistent performance. The YMC facilities are certified according to ISO 9001. Quality agreements are common for validated processes. The manufacturing site is regularly audited successfully by numerous pharmaceutical companies all around the globe.



Regulatory Support

Since all YMC processes and working procedures are thoroughly monitored and documented, YMC always has been in perfect condition to prove full compliance with the requirements. The BioPro IEX resins are supplied with the full technical documentation to show compliance with all applicable regulations. The resins are registered for Drug Master Files and are in use for GMP production of biotherapeutics.

More about YMC – YMC glass columns

Ideally suited for use with BioPro IEX stationary phases: Glass columns made by YMC for biochromatography



ECO columns

Glass columns for low and medium pressure applications

Inner diameter: 10–80 mm Column volumes: 0–5 L

- Easy piston adjustment
- Heating/cooling jacket for temperature sensitive applications
- 1 m long glass bodies for SEC applications



ECO^{PLUS} columns

Glass columns for medium and high pressure applications

Inner diameter: 5–50 mm Column volumes: 0–1 L

- Easy assembly with Quick-Lock system
- Faster runs due to increased pressure limits
- Improved reproducibility due to calibrated glass body

YMC PilotPLUS

Glass columns for pilot scale BioLC applications

Inner diameter: 0–200 mm Column volumes: 0–25 L

- Bubble-free column packing due to unique drain function
- Easy unpacking with removable column body
- 100% biocompatibility

Prepacked Glass Columns

Save time and purchase a prepacked glass column

You may choose from services which include packing of

- New ECO and ECO^{PLUS} columns in standard and custom dimensions
- Your used ECO or ECO^{PLUS} columns
- BioPro IEX resins and other stationary phases




Did you know that you can also...


- ... contact us for on-site packing support?
- ... learn how to pack a column for yourselves in a YMC seminar?

For further information please contact YMC: Phone: +49 (0)2064 427-0 Email: info@ymc.de

More about YMC – YMC columns for biomolecules MW **Proteins / Peptides** 5,000 'MC-Triart C18 Y MCba /MC-Triart Bio C18 10,000 18 IEX SEC RP 20,000 YMC-Triart Bio C4 YMC-Triart C18 30,000 YMC-Pack Diol-60 BioPro IEX OA 70,000 YMC-Triart Bio C18 BioPro IEX QF YMC-Pack Diol-120 100,000 Meteoric Core C18 BIO BioPro IEX SP YMC-Pack Diol-200 150,000 BioPro IEX SF YMC-Pack Diol-300 YMCbasic most appropriate MW range extended MW range by elevated tempe appropriate MW range YMC-SEC MAB YMC-Triart Bio C4 **Oligonucleotides / Nucleic Acids** (Monoclonal) Antibodies SEC RP RP YMC-Triart C18 YMC-Pack Diol-200 YMC-Triart Bio C4 BioPro IEX QA BioPro IEX QA BioPro IEX QF YMC-Pack Diol-300 BioPro IEX QF YMC-Triart Bio C18 BioPro HIC BE YMC-Triar C8 YMC-SEC MAB BioPro IEX SP BioPro IEX SF Hydrosp C18

BioPro IEX Columns -Outstanding resolution and excellent reproducibility

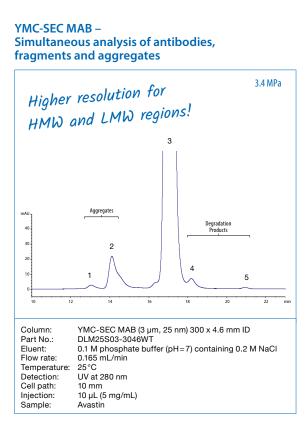

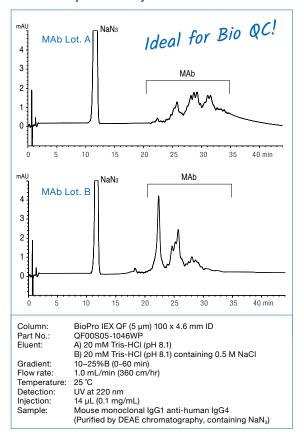

Your local distributor:



BUJNO Chemicals

Bujno Chemicals Marcin Synak Rakowiecka 36 Str. 02-532 Warsaw, Poland phone: +48 22 606 39 58 +48 22 606 39 56 fax.: e-mail: iwona@bujnochem.com bcs@bujnochem.com www.bujnochem.com

YMC Europe GmbH

Chöttmannshof 19 D-46539 Dinslaken Germany Phone +49(0)2064427-0, Fax +49(0)2064427-222 www.ymc.de

YMC Schweiz GmbH

Im Wasenboden 8 4056 Basel Switzerland Phone +41(0)61 561 80 50, Fax +41(0)61 561 80 59 www.ymc-schweiz.ch

YMC CO., LTD. YMC Karasuma-Gojo Bld. 284 Daigo-cho, Karasuma Nishiiru Gojo-dori Shimogyo-ku, Kyoto 600-8106 Japan Phone +81(0)753424515, Fax +81(0)753424550 www.ymc.co.jp